

# INSTALLATION INSTRUCTIONS CARE AND MAINTENANCE



## 0328 TOWNSEND® PEDESTAL SINK

Thank you for selecting American Standard - the benchmark of fine quality for over 100 years. To ensure this product is installed properly, please read these instructions carefully before you begin. (Certain installations may require professional help.) Also be sure your installation conforms to local codes.

**⚠ CAUTION: PRODUCT IS FRAGILE. TO AVOID BREAKAGE AND POSSIBLE INJURY HANDLE WITH CARE!**  
NOTE: Pictures may not exactly define contour of china and components.

### OBSERVE LOCAL PLUMBING AND BUILDING CODES


#### Recommended Tools & Materials




Putty Knife



Adjustable Wrench



Hacksaw



Pipe Wrench



Channel Lock Pliers




Regular Screwdriver



Phillips Screwdriver




Plumbers' Putty or  
Caulking



Drill




Basin Wrench



Level




Tape Measure



Tubing Cutter



Saber Saw

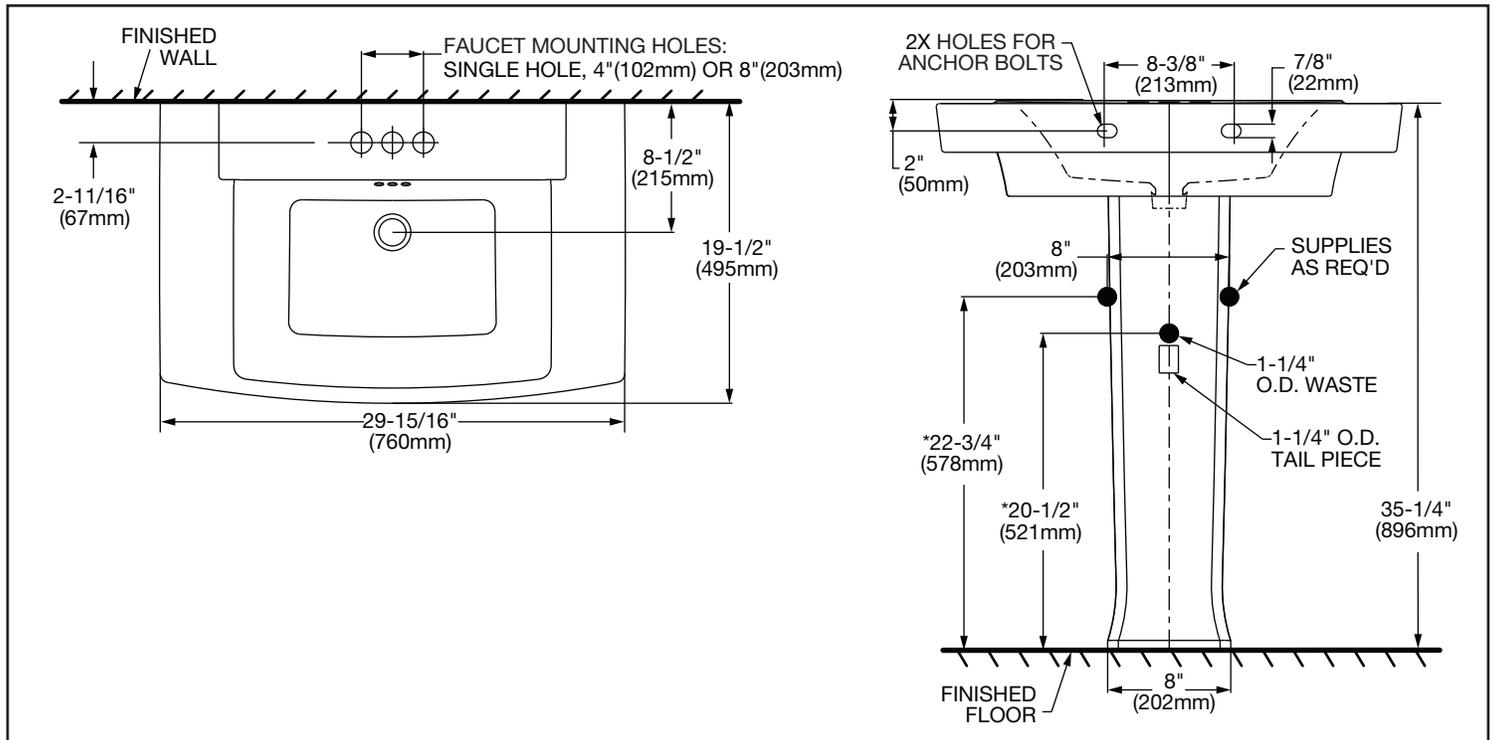

7302307-100

#### In the United States:

American Standard Brands  
1 Centennial Ave.  
Piscataway, New Jersey 08855  
Attention: Director of Customer Care  
For residents of the United States, warranty information may also be obtained by calling the following toll free number: (800) 442-1902  
[www.americanstandard.com](http://www.americanstandard.com)

#### In Canada:

AS Canada, ULC  
5900 Avebury Rd.  
Mississauga, Ontario  
Canada L5R 3M3  
Toll Free: (800) 387-0369  
[www.americanstandard.ca](http://www.americanstandard.ca)

#### In Mexico:


American Standard B&K Mexico  
S. de R.L. de C.V.  
Via Morelos #330  
Col. Santa Clara  
Ecatepec 55540 Edo. Mexico  
Toll Free: 01-800-839-1200  
[www.americanstandard.com.mx](http://www.americanstandard.com.mx)

1

Provide suitable reinforcement behind finished wall for lavatory mounting screws.


\* Determine horizontal center line location of support from fixture.

**NOTE:** If replacing an existing sink be certain to shut off water supply before removing old sink.

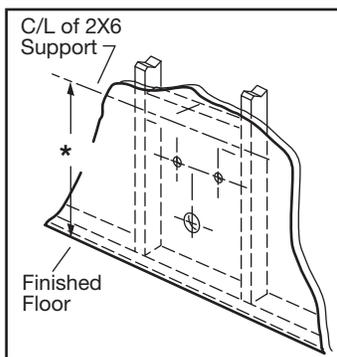


6

Following manufacturer's instructions, install faucet and drain assembly (not included). Be certain to apply a bead of sealing putty on the underside of the drain (area "A") in order to ensure a watertight seal between the lavatory and drain. Remove excess putty after installing drain on lavatory.



2


**Top of Pedestal**



Place lavatory and pedestal into installed position. Level and square the lavatory and pedestal

7

Return the fitted lavatory to the installed position. Connect trap to drain assembly hand tight to check alignment. It may be necessary to cut off part of the tailpiece (area "B") or part of the horizontal leg of the trap (area




3

Mark lavatory and pedestal screw locations through the mounting holes.

4


Remove lavatory and pedestal from installed position. Drill pilot holes for lavatory and pedestal anchor screws or lag bolts.



**Note:** Some models are supplied with lag bolts, anchor screws, or steel hangers for lavatory installations only. Other models and all pedestals are not provided with mounting hardware. Various pedestal screw sizes and types are available to the installer at local hardware outlets.


8

Secure lavatory to wall as shown in **Step 5**. Install washers and hand tighten nuts or lag bolts. Level and square the unit. Connect hot and cold supply lines to the shut-off valves. Tighten trap joints for watertight assembly.



9

Rear View




**Note:** Space constraints may dictate method of fastening pedestal to floor.

5

**ANCHOR SCREW INSTALLATION**


Install lavatory anchor screws leaving 1-7/8" threaded end exposed as illustrated.

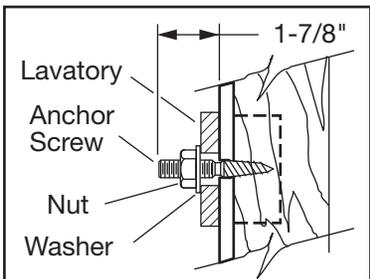

**ALTERNATE METHOD: COMPONENTS NOT INCLUDED**

**LAG BOLT INSTALLATION**

Use lag bolts to secure lavatory as illustrated.

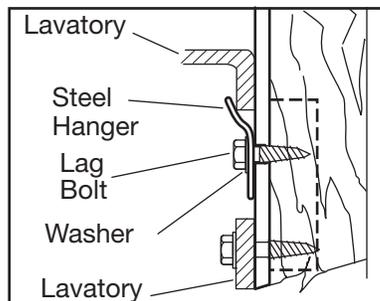

**IMPORTANT:** Final assembly of nut and washer or lag bolt method shown for reference only.