

🗹 Standard Series — Satin Finish

Recessed

ADA Compliant

Product Materials

FRONT PANEL/ FLANGE: 22 gauge stainless steel with exposed surfaces in architectural satin finish. One-piece seamless construction, %" wide with $\frac{1}{4}$ " return.

CABINET: 22 gauge stainless steel.

SOAP VESSEL: 22 gauge stainless steel with exposed surfaces in architectural satin finish. Tumbler lock keyed like other Bradley units.

SOAP VESSEL LINER: low density polyethylene.

SOAP VALVE: chrome-plated brass with ABS mechanism. Requires less than 5 lbs. of force to dispense soap.

Capacity

40-oz. liquid soap.

Operation

Soap dispenser swings open for filling and cleaning. Sight gauge indicates refill time. Valve dispenses measured amount of liquid soap. Requires less than 5 lbs. of force to dispense soap.

Bradley liquid soap valves operate best with any vegetable oil or coconut oil hand soap having a 10–15% soap concentration.

Installation

Verify all rough-in dimensions prior to installation. Requires rough wall opening 6%"W x 11¾"H x 4"D. Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required.

Guide Specification


Recessed liquid soap dispenser shall be fabricated of 22 gauge stainless steel with exposed surfaces in satin finish. Requires less than 5 lbs. force to dispense soap. Capacity: 40-oz. liquid soap.

Overall dimensions: $73\!4"W$ x $125\!\%"H$ x $41\!\prime_{16}"D.$

🔄 ADA Compliant

Consult local and national accessibility codes for proper installation guidelines.

Conformity and compliance to local and national codes is the responsibility of the installer.

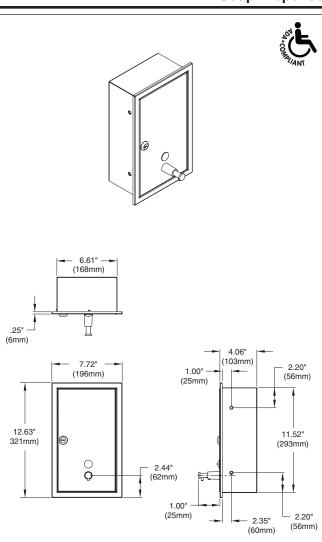

Page 1 of 1 2/28/2011 This information is subject to change without notice. Bradley_SoapDispenser_646 © 2014 Bradley P.O. Box 309, Menomonee Falls, WI 53052-0309 800 BRADLEY (800 272 3539) +1 262 251 6000 bradleycorp.com