



PERCY®

WALL MOUNT FAUCET



- Contemporary design with industrial elegance
- Cast brass spout and side valves
- Ceramic disc valve cartridges
- Distinct, geometric handle design
- Lead Free — faucet contains $\leq 0.25\%$ total lead content by weighted volume
- Maximum flow rate: 1.5 gpm (5.7 L/min)
- Low flow rate: 1.2 gpm (4.5 L/min)

CODES AND STANDARDS

Meets or Exceeds ASME A112.18.1/ CSA B125.1, NSF 61/Section 9

EPA WaterSense® Certified

Certified Compliant with $\leq 0.25\%$ Weighted Average Lead Content Regulations

CEC and CALGreen® Compliant

AVAILABLE FINISHES

Polished Chrome
Brushed Nickel

FINISH CODE

100
144

DESCRIPTION

Wall Mount Faucet
1.5 gpm (5.7 L/min)

- Cross Handles
- Lever Handles (ADA only)

1.2 gpm (4.5 L/min)

- Cross Handles
- Lever Handles (ADA only)
- Tri-Spoke Handles (ADA only)

Dual Control Wall Mount
Faucet Rough Valve
(required component)

PRODUCT NUMBER

- ★ D35105454.XXX
- ★ D35105450.XXX

D3510546C.XXX
D3510545C.XXX
D35105470.XXX
D35000450.191



Cross



Lever



Tri-Spoke

ROUGH-IN DIAGRAM
SHOWN ON NEXT PAGE

★DISCONTINUED. Available while supplies last.


CALGreen® is a registered trademark of California Building Standards Commission.



Meets the Americans with Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.



PERCY® WALL MOUNT FAUCET

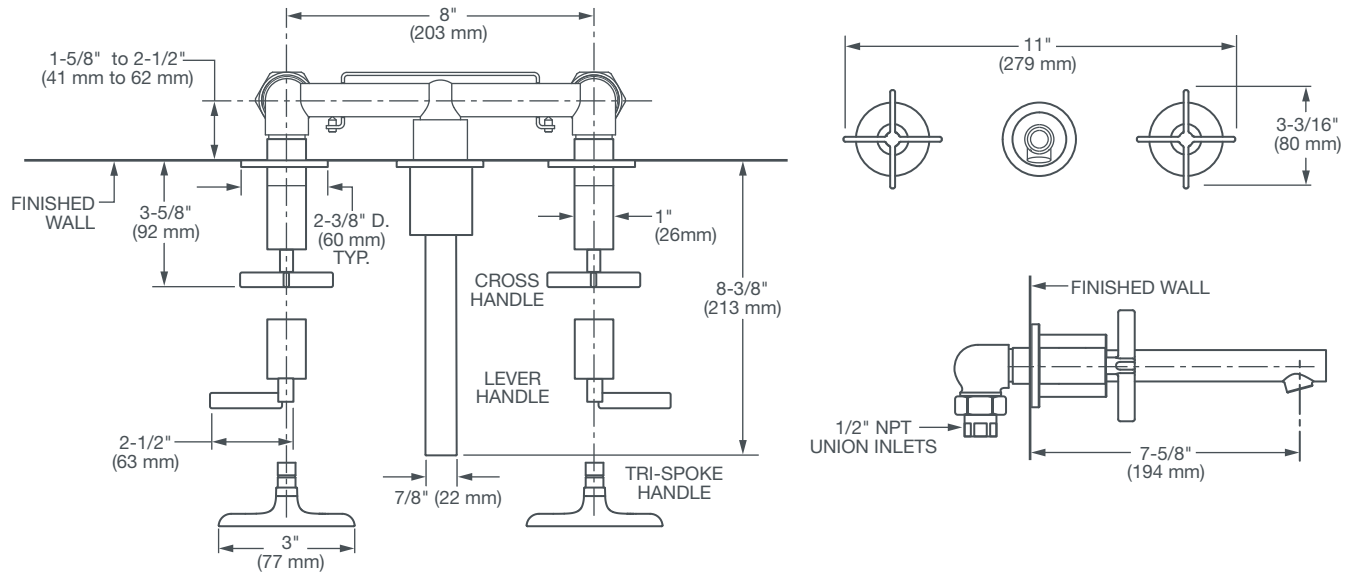

IMPORTANT: These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

PART OF LIXIL