KALLISTA.

For Town Thermostatic Trim

FEATURES

- Solid brass construction for durability and reliability
- Allows bather to set precise temperature
- Patented K-joint installation ensures consistent trim appearance, regardless of variability in valve rough-in

€ of Valve

Inlet

1/2" (13 mm)

2-7/16" (62 mm) Min 3-3/4" (95 mm) Max

€ of Valve Outlet

• Complements the For Town collection

CODES/STANDARDS APPLICABLE

P22762

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1

ADA CSA B651 OBC

- OBC* (Lever only)
- CSA B651*


3-1/2"


(89 mm)


3" (7<u>6</u>mm)

ADA*

* Compliant when installed to the specific requirement of this regulation

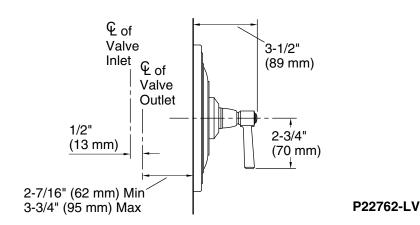







SPECIFIED MODEL		
Model	Description	Finishes
P22762-LV	For Town Thermostatic Trim, Lever Handle	CP Polished Chrome CA AD Nickel Silver AG Brushed Nickel
P22762-XX	For Town Thermostatic Trim, Cross Handle	CP Polished Chrome CA AD Nickel Silver AG Brushed Nickel
P22762-CC	For Town Thermostatic Trim, Crystal Cross Handle	CP Polished Chrome CA AD Nickel Silver AG Brushed Nickel
P22762-BC	For Town Thermostatic Trim, Black Cross Handle	CP Polished Chrome CA AD Nickel Silver AG Brushed Nickel
Required Rough-In		
P29511-WS	1/2" Thermostatic Mixing Valve	D NA
P29512-WS	3/4" Thermostatic Mixing Valve	🖵 NA

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.

Questions? Problems? For additional assistance, please contact KALLISTA's Customer Service Department at 1-888-4-KALLISTA (1-888-452-5547) or kallista.com.