

Model:	14-814L-L

Item #: \_\_\_\_\_

Date: \_

Qty:\_\_ \_ Approved by: \_

## 8" Wall Mount with 14" Swing Spout, Lever Handles

**Royal Series Plumbing** 



8" Center Wa	all Mount Fau	C
Ol	. IL	

**DESCRIPTION** 

cet with 14" Swing Spout, Lever Handles, Polished Chrome Finish

## STANDARD FEATURES

- ¼ Turn High Performance Ceramic Cartridge Valves with Integral Check
- Durable Full Range Swing Spout with Double O-ring Construction
- Lever Handles
- Warranty: 3 Years

SPECIFICATIONS	
Water Inlet	1/2" NPT
Temp. Range	40°F - 180°F
Rough In	7/8" Round Holes on 8" Center
Material	Chrome Plated Brass
Weight	5 lbs.

## **AERATORS**


Standard Aerator	Suffix
☐ 0.20 GPM Aerator	E1
☐ 0.50 GPM Aerator	E2
☐ 1.00 GPM Aerator	E3
☐ 1.50 GPM Aerator	E4
☐ 1.80 GPM Aerator	E5
☐ 2.20 GPM Aerator	E6


Vandal Resistant Aerator		Suffix
	0.35 GPM Aerator	G1
	0.50 GPM Aerator	G2
	1.00 GPM Aerator	G3
	1.50 GPM Aerator	G4

- ASME A112.18.1-2011/CSA B125.1-11
- NSF-61
- NSF/ANSI 372
- Meets ANSI A117.1 (ADA)
- California Proposition 65

Laminar Flow Outlet	Suffix
☐ 0.50 GPM Outlet	F1
☐ 1.50 GPM Outlet	F2

Vandal Resistant Laminar Flow Outlet	Suffix
☐ 0.35 GPM Outlet	H1
☐ 0.50 GPM Outlet	H2
☐ 1.00 GPM Outlet	НЗ
☐ 1.50 GPM Outlet	H4



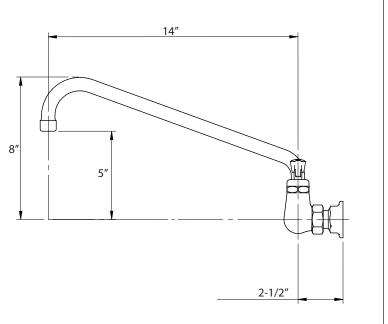

MARNING: Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes.

A WARNING: This product can expose you to chemicals including lead and lead compounds which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.