# 149-154 **QUANTUM ONE**™

### MANSFIELD®

Elongated Front, Pressure-Assist, Rear Outlet, Floor-Mount, Vitreous China, Two-Piece Toilet

### **FEATURES**

- High performance pressure-assist, high efficiency toilet (HET)
- Flushmate IV<sup>™</sup> flushing technology
- 1.0 gpf / 3.8 lpf ultra-low water consumption
- Saves almost 40% more water than conventional
   1.6 gpf flushing systems
- · Elongated front, floor-mount, rear outlet bowl
- · Model 47 chrome-plated, plastic push button actuator
- 1-7/8' glazed trapway
- The Mansfield® limited lifetime warranty on china, Flushmate ten-year limited warranty on vessel
- · Available in White, Biscuit and Bone



#### COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
149-154	Elongated front, floor-mount, rear outlet, pressure-assist, two-piece toilet. Includes tank trim. Less toilet seat and supply. Specify color.			
149	Elongated front, rear outlet, floor-mount, pressure-assist bowl only. Less toilet seat and supply. Specify color.			
154	Pressure-assist tank and cover only with chrome-plated, plastic push button actuator. Less supply. Specify color.	Web (Map)		
TANK OPTIONS		HIGH EFFICIENCY TOLLET  TOLLET		
153RH	Pressure-assist tank and cover only with right hand chrome-plated, metal trip lever. Less supply. Specify color.			
153	Pressure-assist tank and cover only with left hand chrome-plated, metal trip lever. Less supply. Specify color.			
TANK TRIM & RE	TANK TRIM & REPLACEMENT PARTS			
47	Chrome-plated, plastic push button actuator			
122-LID	Tank lid			
FLUSHMATE® 504	Pressure-assist flushing system. Separate warranty applies. Contact FLUSHMATE® at 1-800-533-3460.			



# 149-154 **QUANTUM ONE**™

## **MANSFIELD®**

Elongated Front, Pressure-Assist, Rear Outlet, Floor-Mount, Vitreous China, Two-Piece Toilet

### **SPECIFICATIONS**


MODEL #	DESCRIPTION	CODES/STANDARDS
149-154	Elongated front, rear outlet, floor-mount (1.0 gpf / 3.8 lpf) two-piece toilet	HIGH EFFICIENCY  HIGH EFFICIENCY  OFFICIAL STATES OF THE S

MATERIAL	Vitreous China
WATER PRESSURE RANGE	35 to 80 PSI
FLUSH SYSTEM	Flushmate IV™ flushing technology
WATER USAGE	1.0 gpf / 3.8 lpf
WATER SURFACE AREA	9-7/8' X 12-1/4'
ROUGH-IN	Rear outlet
MAP RATING	1,000 grams

TRAP DIAMETER	1-7/8'
TRAP SEAL	2-3/4'
SHIPPING WEIGHT	Model 149 - 60 lbs. (27.2 kg) Model 154 - 41 lbs. (18.5 kg)
WARRANTY	Vitreous China - Limited Lifetime Vessel - Limited Ten Year (Flushmate)

### **TECHNICAL INFORMATION**

**Note**: these dimensions are nominal and subject to change without notice.

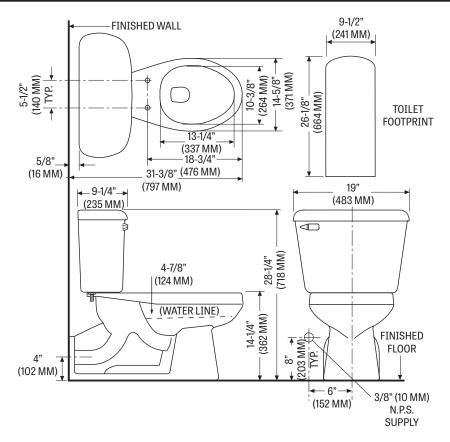

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.

