4135LTCK **PRO-FIT®2 - 1.28**

Complete Toilet Kit, Elongated Front, Vitreous China, Two-Piece Toilet

FEATURES

- Complete toilet kit (CTK)
- 3-bolt SmartFasten[™] tank-to-bowl connection
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- Uses 20% less water than conventional toilets
- Elongated front bowl
- 3-2" hybrid flapper flush valve
- Fluidmaster[®] anti-siphon pilot fill valve
- 12' rough-in
- Lined tank for reduced condensation
- Model 31 color-match, plastic trip lever
- 2' glazed trapway
- The Mansfield[®] Limited Lifetime Warranty
- · Available in White

COMPONENTS

MDDEL 4135LTCTK Toilet seat included Complete toilet kit

MODEL #	DESCRIPTION	CODES/STANDARDS
4135LTCTK	Elongated front, two-piece toilet kit. Includes toilet seat, wax ring, floor bolts, caps and multi-lingual installation instructions. Water supply hardware not included.	
135	Elongated front, toilet bowl only. Less toilet seat.	
3174	Tank and cover only with left hand, front-mount, color-match, plastic trip lever. Tank liner. Fluidmaster® fill valve. Less supply.	
SB200	Elongated front, plastic toilet seat and cover.	
TANK TRIM & R	EPLACEMENT PARTS	
31	Trip lever – color-match, plastic trip lever, left hand	
228	3-2" Hybrid flapper flush valve	
400A	Fluidmaster® anti-siphon pilot fill valve	
2206	Anti-siphon pilot fill valve (compatible replacement)	
630-0207	3" Replacement flapper kit	
160-LID	Tank lid	



4135LTCTK **PRO-FIT®2 - 1.28**

Complete Toilet Kit, Elongated Front, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
4135LTCTK	Elongated front (1.28 gpf / 4.8 lpf) two-piece toilet kit	HIGH EFFICIENCY HIGH EFFICIENCY

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3-2" Hybrid flapper flush valve
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	9' X 10'
ROUGH-IN	12'
MAP RATING	800 grams

TRAP DIAMETER	2'
TRAP SEAL	2-1/2'
SHIPPING WEIGHT	Model 4135LTCTK - 88 lbs. (40 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

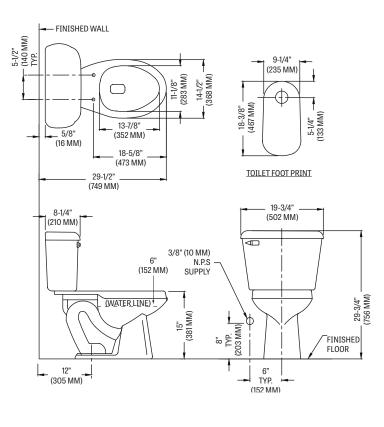



Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.