
## **MANSFIELD**<sup>®</sup>

## 5378 Hampton OV™ 68" x 42" x 23 ½" Swirl-way<sup>®</sup> Air Massage Bath

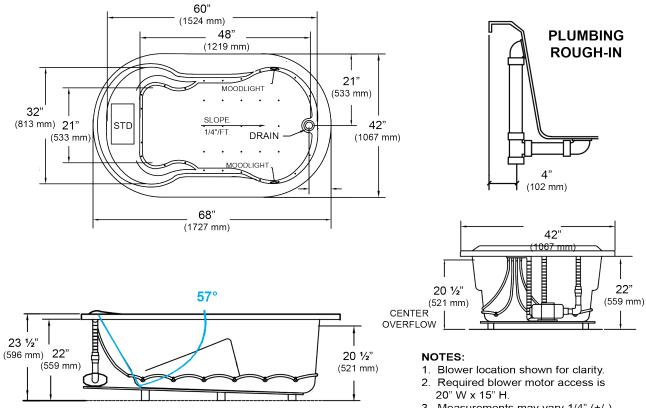

CENTER OVERFLOW

- 3. Measurements may vary 1/4" (+/-).
- 4. Optional removable apron is not available on this unit.
- Installer note: due to the freeform shape of the tub shell, it is recommended that the tub be on the job before making the final cut-out for drop-in installation.

SPECIFICATIONS			
Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Number of Jets	34
Construction	Self-contained, pre-plumbed air bath system mounted on a pre-leveled base	Water Capacity	60 gal. (min) 80 gal. (max)
Blower Motor	1.0 HP Variable Speed - 120 V, 9.0 AMP	Floor Loading Weight	47 lbs. / sq. ft (229 kg/m <sup>2</sup> )
Electrical Requirements	One 120V, 20 AMP, GFCI Protected Circuit	Shipping Weight	180 lbs.
On/Off Control	Six button electronic control 20 minute time cycle, and auto purge cycle	Warranty	Limited Ten Year

NRTL IAPMO EGS US



Printed in U.S.A. 04/17 © Mansfield Plumbing Products, LLC Mansfield Plumbing Products • Customer Service Toll Free: 877-850-3060 • Fax 419-938-6234 Website: www.mansfieldplumbing.com • E-mail: custsrvs@mansfieldplumbing.com

