

DESCRIPTION

- Various finishes identified by suffix
- Magnetix™ technology features an innovative magnetic docking system
- Includes handshower, hose and magnetic docking system
- 60" double interlock spiral metal hose (for 220H2 series)
- 72" double interlock spiral metal hose (for 220H3 series)
- Assembled with 2 check valves for backflow prevention

OPERATION

- Adjust lever to select desired spray function.

FLOW


- Flowrate for non-EP models is 2.5 gpm
- Flowrate for EP suffix models is 1.75 gpm

STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1, ASSE 1014 and all applicable specifications referenced therein


WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 5 year limited warranty when used in a commercial installation
- 10 year limited warranty when used in a multifamily installation
- Visit www.moen.com/support for complete details and limitations

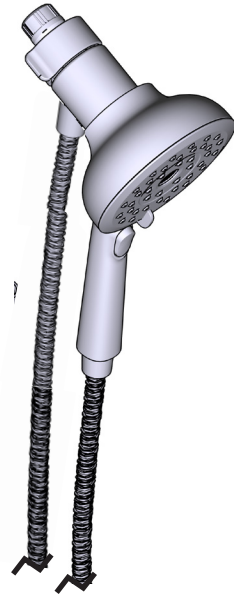

Moen® Magnetix™
Handshower with Magnetix™ Docking

MODELS: 220H2 Series
220H2EP Series

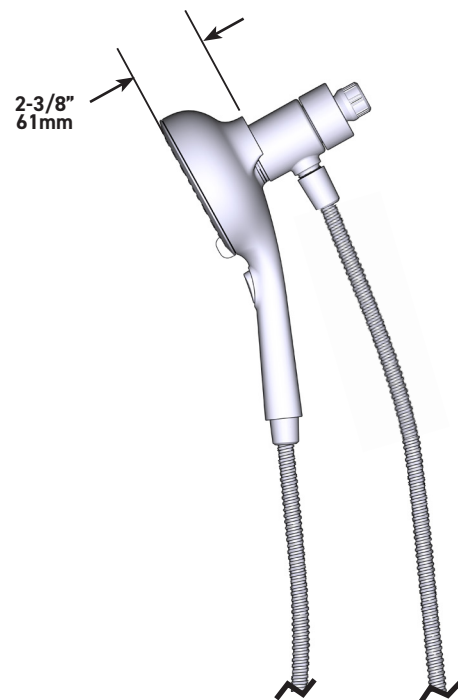

CRITICAL DIMENSIONS DO NOT SCALE