Defining Luxury Since 1959

## Mini Thermostatic Valve w/Volume Control or Diverter

4-170




# **TECHNICAL DETAILS**

ADA Compliance: No Access Hole: 2" x 7" Number of Handles: Two Handle Spread: 5" Top Handle Turn Angle: Quarter Turn Bottom Handle Turn Angle: 115-118° Installation Type: Wall Mounted Primary Material: Brass Valve Material: Ceramic Flow Rate: 6.5 GPM Flow Restriction: 1.8 GPM per function Water Pressure Maximum: 85 PSI Water Pressure Minimum: 20 PSI

Water Pressure Recommended: 60 PSI

#### **PRODUCT FEATURES**

- Style: Contemporary
- Collection: Basic II
- Temperature Controlled By Thermostatic
- Marble Handles

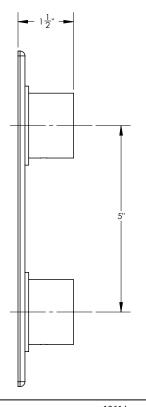

### **CODES & STANDARDS**





ASME A112.181/ CSA B1251, ASME 112.18.2/ CSA B125.2, ANSI NSF, CEC, Watersense 61 Sect. 9, State of MA.

#### **WARRANTY**

Mechanical Warranty: 10 Years from date of purchase. Finish Warranty: See catalog for further information.

