SLOAN.

CODE NUMBER

70021001

DESCRIPTION

SU-7009 Urinal and ROYAL 186 Flushometer.

COMPONENTS

- Flushometer: Code 3912648
- Urinal: Code 1107009

DETAILS

- Flush Volume: 0.25 gpf (0.9 Lpf)

FLUSHOMETER FEATURES

- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Sweat Solder Adapter with Cover Tube & Cast Wall Flange with Set Screw
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Diaphragm, Handle Packing and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance
- ADA Compliant Metal Oscillating Non-Hold-Open Handle

3/4" I.P.S. Screwdriver Bak-Chek $\ensuremath{^{\ensuremath{\mathbb R}}}$ Angle Stop w/ Free Spinning Vandal Resistant Stop Cap

FIXTURE FEATURES

- White Vitreous China
- Washdown flushing action
- Integral flushing rim
- ³/₄" I.P.S. top spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested



COMPLIANCES & CERTIFICATIONS



(ADA Compliant, cUPC Green Certified, WaterSense Listed, BAA Compliant, Satisfies LEED Credits, HPD, EPD)

DOWNLOADS

- Small Spud Urinal Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Additional Downloads

NOTES

All information contained within this document subject to change without notice.



FINISHED FLOOR

-

 \mathcal{O}

FINISHED FLOOR

. 11 1/2" (292 mm)

11 5/8" (295 mm)

18 3/8" (467 mm)

11 3/8" (289 mm) ADA


19" (483 mm)

Outlet

14 3/4" (375 mm) 2 1/4" (57 mm)

ROUGH-IN

SLOAN₈

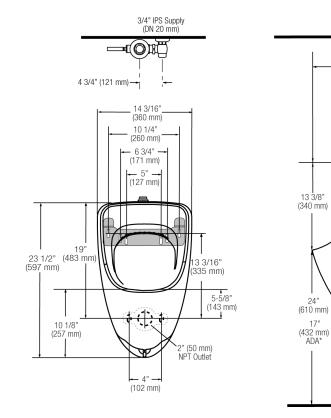

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com