



Accord®

60" x 30" Tile AFD Bath/Shower with Backer Boards
71140118



Features

- Alcove installation
- 17-1/4" apron
- Vikrell material
- Left drain
- Pivot snap-together modular design
- Smooth, high-gloss walls
- No caulk required
- Molded-in shelves
- Aging in Place backerboards
- 3" drain-to-floor clearance for above-floor drain installation

Recommended Products/Accessories

- 71147103 ADA Adaptable Grab Bar Kit
- 71147104 30" Bath Seat Kit

Included Components

Product consists of:

- 71144106 60"x 30" Tile Wall Set with Backer Board
- 71141118 60" x 30" AFD Bath with Backer Board



Codes/Standards



- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662
- Greenguard UL 2818 - Gold
- HUD, UM Bulletin 73

Warranty – Bathing Fixtures (and) Kitchen and Utility Sinks Made of Solid Vikrell® Material

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|--|------|----------------|
|  | 0 | White |
|  | 96 | KOHLER Biscuit |


1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.sterlingplumbing.com.

4-26-2019 00:18 - US

60" x 30" Tile AFD Bath/Shower with Backer Boards 71140118

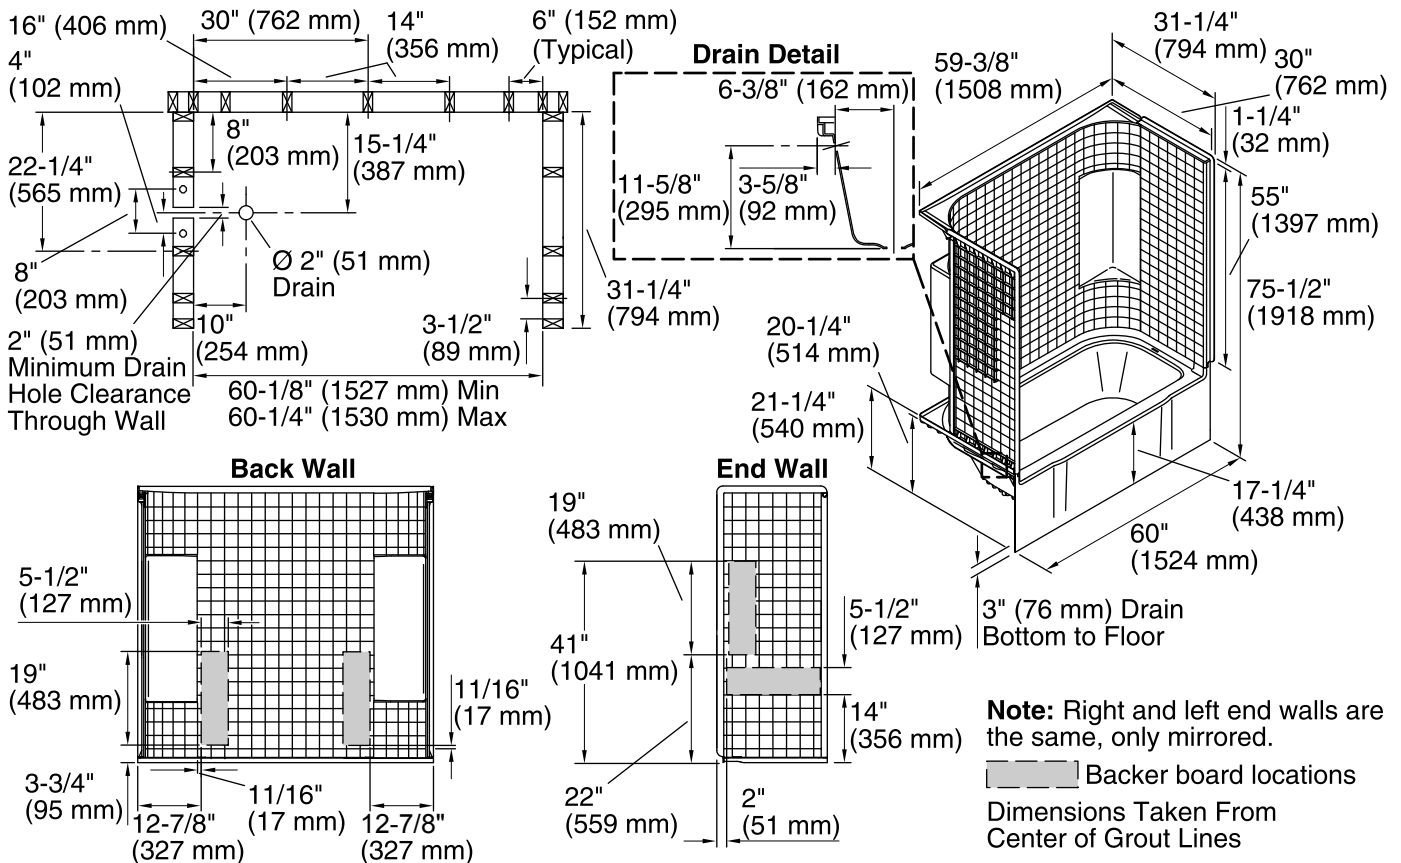

Technical Information

All product dimensions are nominal.

| | |
|------------------------|--------------------------------------|
| Installation: | Three-wall alcove |
| Drain location: | Left |
| Basin area, bottom: | 46-1/4" x 20-1/2" (1175 mm x 521 mm) |
| Basin area, top: | 52-1/4" x 22-1/2" (1327 mm x 572 mm) |
| Water depth: | 11" (279 mm) |
| Water capacity: | 34 gal (128.7 L) |
| Minimum flat for door: | 2-3/4" (70 mm) |
| Maximum door height: | 56-1/2" (1435 mm) |
| Maximum door width: | 56-3/4" (1441 mm) |

Notes

- Install this product according to the installation instructions.
- Product is designed to be used with a single-hole mixer valve with an escutcheon cover not to exceed 7-3/4" (197 mm) in width.
- Studs should be positioned roughly as shown.
- Bath cannot be installed without the wall surround.
- Attach grab bars at the specified backerboard locations only.
- Width shifts from 60" (1524 mm) at front to 59-3/8" (1508 mm) at back. Use 1/4" (6 mm) furring strips at back for drywall over nailing-in flange installation.
- ADA adaptable when grab bars and seat are installed per the specific requirements of these regulations.
- For future ADA compliance, select a mixing valve location that will not interfere with a control wall grab bar.