







Feature Highlights

- Carrington Shower Valve Trim
- Requires Temptrol® Pressure Balancing Shower Valve
- Metal lever handle
- Diverter tub spout not included
- Showerhead not included
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 4400TRMTC)

Options/Modifications

-LP Loop handle

П

-STN

□ -REB Rebuild trim kit, includes TA-10 and TA-4

□ -VP Vandal resistant escutcheon screws in place of

standard screws
Satin Nickel finish

Model Numbers

□ 4400-TRM

Shower Valve Trim, Temptrol Pressure Balancing Shower Valve ordered separately

☐ 4400TRMTC

Shower Valve Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap

Compliance

ASME A112.18.1/CSA B125.1



Warranty


Limited Lifetime - to the original end purchaser in consumer/residential installations.

5 Years - for industrial/commercial installations.

Refer to www.symmons.com/warranty for complete warranty information. Go to www.symmons.com/register to register your Symmons product.

Note: Append appropriate -suffix to model number.

Dimensions

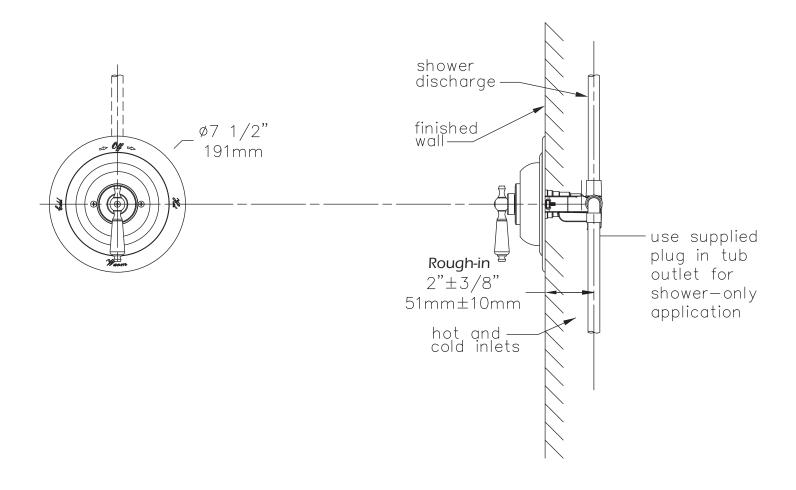

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.