

Thermostatic Mixing Valve with Two-Way Diverter Trim - Square

FEATURES

- For use with MiniUnit™ (TBN01001U)
- Unobtrusive twist assist for a clean aesthetic
- Meets 2018 California water efficiency CEC leakage regulations
- Thin escutcheon at approximately 10mm
- ASSE certified Safety Thermo™ (SMA) Thermostatic Mixing Valve

COLORS/FINISHES

- #CP Polished Chrome
- #PN Polished Nickel
- #BN Brushed Nickel

CODES/STANDARDS

- Meets or exceeds ASSE 1016/ASME A112.1016/CSA B125.16, ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, CEC, and others
- Complies with CA Prop 65 warning requirements



PRODUCT SPECIFICATION

Product shall be TOTO Model TBV02404U#____.
Product shall require TBN01001U MiniUnit (sold separately). Product shall be a temperature control valve and trim with anti-scald safety stop. Product shall be ASSE certified.



TBV02404U


Thermostatic Mixing Valve with Two-Way Diverter Trim - Square

SPECIFICATIONS

| | |
|----------------------------|---|
| Material | Brass |
| Warranty | Limited Lifetime (Residential Use) One Year (Commercial Use) |
| Shipping Weight | 5.55 lbs |
| Shipping Dimensions | 9-1/4" x 7-5/8" x 6" |

INSTALLATION NOTES

Requires TBN01001U MiniUnit (sold separately).

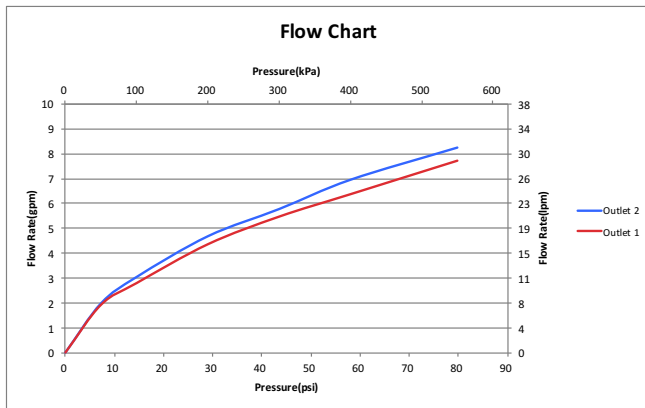

DIMENSIONS

