

Flexible Rubber Couplings & End Caps

Specification Sheet


FEATURES & BENEFITS

- Stainless Steel Bands are corrosion-resistant & rustproof
- Durable Rubber for all Sch. 40 Pipe Applications
- Positive seal against infiltration and exfiltration
- UPC Approved
- Conforms to ASTM C 1173 and CSA B602
- Sizes 1-1/4" - 6" regular & reducing




TECH SPECS

- Installation torque: 60 inch lbs.
- Maximum test pressure: 4.3 PSI
- Maximum operating temperature: 140° F non-consistent
- Minimum operating temperature: - 30° F

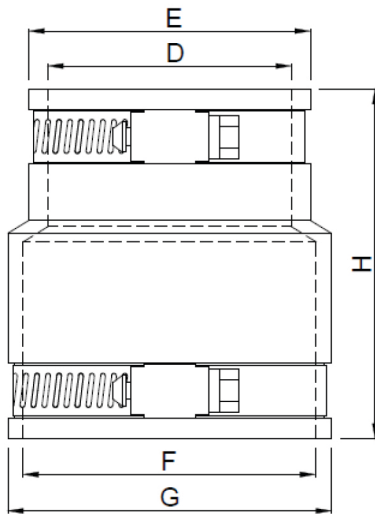

DIMENSIONS

| Part # | Size | D | E | F | G | H |
|---------|---------------|------|------|------|------|------|
| 4560706 | 1-1/2 x 1-1/4 | 1.63 | 2.12 | 1.94 | 2.43 | 3.50 |
| 4560807 | 2 x 1-1/2 | 1.84 | 2.34 | 2.41 | 2.87 | 3.50 |
| 4561007 | 3 x 1-1/2 | 1.91 | 2.49 | 3.35 | 3.97 | 4.00 |
| 4561008 | 3 x 2 | 2.38 | 2.94 | 3.52 | 4.20 | 4.00 |
| 4561107 | 4 x 1-1/2 | 1.91 | 2.50 | 4.40 | 5.05 | 4.00 |
| 4561108 | 4 x 2 | 2.35 | 3.00 | 4.40 | 5.02 | 4.00 |
| 4561110 | 4 x 3 | 3.52 | 4.31 | 4.46 | 5.17 | 4.00 |
| 4561311 | 6 x 4 | 4.46 | 5.21 | 6.61 | 7.39 | 5.75 |

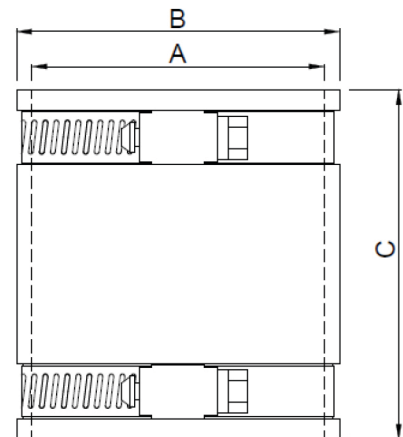



DIMENSIONS

| Part # | Size | A | B | C |
|---------|-------|------|------|------|
| 4560606 | 1-1/4 | 1.63 | 2.09 | 3.50 |
| 4560707 | 1-1/2 | 1.94 | 2.43 | 3.50 |
| 4560808 | 2 | 2.41 | 2.90 | 3.50 |
| 4561010 | 3 | 2.99 | 4.25 | 4.00 |
| 4561111 | 4 | 4.58 | 5.22 | 4.00 |
| 4561212 | 5 | 5.52 | 6.16 | 4.00 |
| 4561313 | 6 | 6.60 | 7.32 | 6.00 |



Flexible Rubber Couplings & End Caps

Specification Sheet

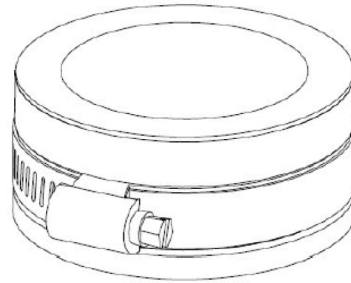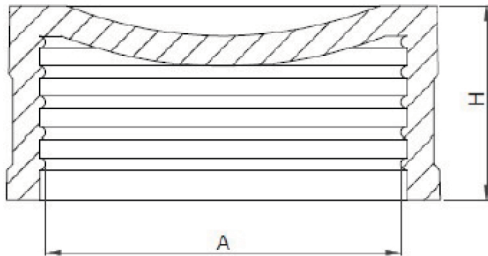

DIMENSIONS

| Part # | Size | A Diameter | H Height |
|---------|--------|---------------|-------------|
| 456007C | 1-1/2" | 1-1/2" | 1.15 |
| 456008C | 2" | 2" | 1.26 |
| 456010C | 3" | 3" | 1.37 |
| 456011C | 4" | 4" | 1.63 |

