
American Standard

Edgemere® Water-Saving Pressure Balance Bath/Shower Trim



with Double Ceramic Pressure Balance Cartridge

MODEL NUMBER:

TRIM KITS:

TU018508 Edgemere Bath/Shower Trim Kit with Pressure Balance Cartridge

Lever handle. Water-saving showerhead. LESS valve body.

 TU018507 Edgemere Shower ONLY Trim Kit with Pressure Balance Cartridge

Lever handle. Water-saving showerhead. LESS valve body.

For use with Flash[™] Rough Valve Bodies

TU018508 Bath/Shower Trim Shown

GENERAL DESCRIPTION:

Double Ceramic Pressure Balance Cartridge: Features one-piece design with ceramic discs and ceramic balancing spool. Includes integrated check valves and hot limit safety stop. Cartridge available for back to back capability. Ceramic balancing spool maintains constant output temperature in response to changes in relative hot and cold supply pressure. Washerless ceramic discs provide smooth handle movement and are unaffected by harsh water conditions. Cycles from "off" to "cold" to "hot".

Trim: Features 5-3/4" water-saving showerhead with a maximum 1.8 gpm/6.8 L/min. flow rate. Metal slip-on diverter spout. Metal wall valve trim with metal lever.

PRODUCT FEATURES

One-Piece Cartridge: Simplifies installation and maintenance.

Double Ceramic Pressure Balance Cartridge:

Combination of Ceramic Disc Mixing Valve and a Ceramic Balancing Spool in a one-piece cartridge.

Ceramic Disc Mixing Valve: Assures a lifetime of drip-free performance and smooth handle operation.

Ceramic Balancing Spool: Maintains a constant output temperature in response to changes in relative hot and cold supply pressure. Ceramic material is unaffected by mineral deposits and harsh water conditions.

Integrated Check Valves: Engineered to eliminate cross flow. **Adjustable Hot Limit Safety Stop:** Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.


Comfort Zone: Offers a wider shower range to fine tune the desired temperature within the useful temperature zone

Back-to-Back Capability: Hot and cold can be reversed quickly and easily.

Water Saving: Saves 28% water usage.

SUGGESTED SPECIFICATION

Bath/shower fitting shall feature water saving showerhead with Max. 1.8 gpm/6.8 L/min. flow rate. Shall feature double ceramic pressure balance cartridge. Cartridge shall feature integrated check valves to eliminate cross flow. Capable of meeting ASSE1016 @1.3gpm. Cartridge shall also feature hot limit safety stop. Fitting shall be: American Standard - Trim Kit Model # TU18450_.___ and Flash Valve Body Model # RU10____.

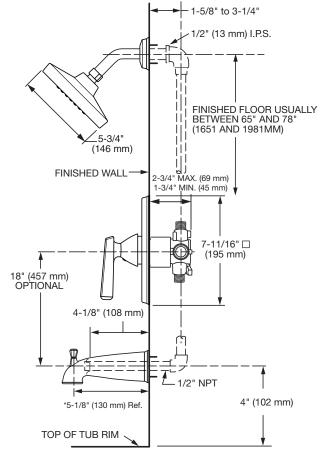

American Standard


Edgemere® Water-Saving Pressure Balance Bath/Shower Trim with Double Ceramic Pressure Balance Cartridge

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASSE 1016 / ASME A112.18.1016 / CSA B125.16 ASME A112.18.1 / CSA B125.1 Rated to meet ASSE 1016 @ 1.3gpm

CEG



| | | | Finish Options | | |
|-------------|----------|--|--------------------|------------------|--------------------------|
| TRIM KITS * | Product | | Polished Chrome | Legecy Bronze | PVD Brushed Nickel |
| | Number | Description | 002 | 278 | 295 |
| | TU018508 | Bath/Shower Trim Kit. Metal lever handle. Water-saving showerhead. LESS valve body. | | | |
| | TU018507 | Shower Only Trim Kit. Metal lever handle. Water-saving showerhead. LESS valve body. | | | |

* TRIM & ROUGH MUST BE ORDERED SEPARATELY.

| DIES | Product Description | Without Screwdriver Stops | With Screwdriver Stops |
|-----------------------------------|--|---------------------------------|------------------------------|
| Flash [™] ROUGH VALVE BO | Rough Valve Body. Universal* inlets/outlets. | RU101 | RU101SS |
| | Rough Valve Body. Stub-out inlets/outlets for Press-Fit Fittings. | RU102 | RU102SS |
| | Rough Valve Body. PEX inlets/Universal outlets for Crimp Ring PEX system (ASTM F1807). | RU107 | RU107SS |
| | Rough Valve Body. PEX Elbow inlets/Universal outlets for Crimp Ring PEX system (ASTM F1807). | RU107E | RU107ESS |
| | Rough Valve Body. PEX inlets/Universal outlets for Cold Expansion PEX system (ASTM F1960). | RU108 | RU108SS |
| | Rough Valve Body. PEX Elbow inlets/Universal outlets for Cold Expansion PEX system (ASTM F1960). | RU108E | RU108ESS |
| | Rough Valve Body. CPVC inlets/Universal outlets. | RU109 | RU109SS |

| DPTIONAL CCESSORY | Product Number M954805-0070A | Product Description |
|-----------------------------|------------------------------------|------------------------|
| | M954805-0070A | Deep Rough-In Kit |
| • | M970640-0070A | Back to Back Cartridge |

ADA

A Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

PART OF LIXIL